JENCODER
J-260-58-BN-SL

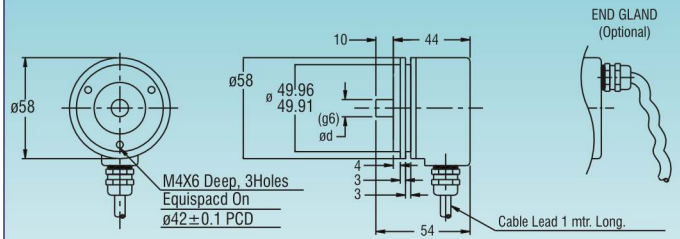

- Versatile model having many options
- Exact retrofit replacement for majority of machine tool spindle encoder
- Constructed to withstand the demands of rough and Tough industrial environment

J-260-58-BN-SL

Channels	**R**=ABZ / **Q**=AB / **A**=A
Output	**HV**=Driver (10mA Source /sink) without inverted channels
	HVLD=Driver (10mA Source /sink) with inverted channels
	PP= High Power Driver (50mA Source /sink) without inverted channels
	PPLD=High Power Driver (50mA Source /sink) with inverted channels
	OC=Open Collector without inverted channels
PPR	see ppr option below
Voltage	**V1**=5vdc / **V2**=10-28vdc / **V3**=5-28vdc
Shaft Ø d	**10**=10mm / **6**=6mm / **X**=special
Protection	**1**=IP50 / **2**=IP65
Temperature	**S**=70°C
Connection Location	**EG**=End Gland / **SG**=Side Gland / **E**=10pin End connector

Ordering Example - J-260-58-BN-SL-R-HV-1000-V1-6-1-S-EG

Model J-260-58-BN-SL PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54, 55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,13 0,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300, 305,333,350,360,480,500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250, 1270,1500,2000,2048,2500,3000,4096,5000,6000,7200,8192 and 10000

• 020 2712 8095 / 6630 8094 • sales@jencoder.com • www.jencoder.com