


J-260-71 E-CUBE

JENCODERTM
THE PERFECT CODER



All dimensions are in mm with a tolerance of ± 0.1 unless otherwise specified

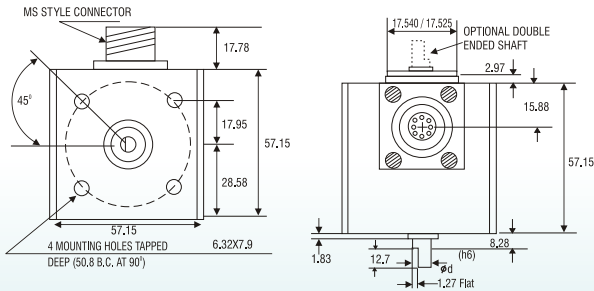

- Double ended shaft to mount measuring wheels for cut to length application
- Shatter proof disc
- Face or Base mounting available

Channels	R=A B Z / Q=A B / A=A
Output	HV = Driver (10mA Source /sink) without inverted channels HVL D = Driver (10mA Source /sink) with inverted channels OC = Open Collector without inverted
PPR	see ppr option below
Voltage	V1=5vdc / V2=10-28vdc / V3=5-28vdc
Shaft Type	S = Single ended / D=Double ended
Shaft Size $\varnothing d$	6.35 = 6.35 / 9.52 = 9.52
Protection	1 = IP50
Temperature	S = 70°C / H=85°C
Connection Location	E = Connector

Ordering Example - J-260-71-R-HV-1000-V1-S-6.35-1-S-E

Model J-260-71 PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300,305,333,350,360,480,500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250,1270,1500,2000,2048,2500,3000,4096,5000,6000,7200,8192 and 10000