


JENCODER J-260-ND-SL

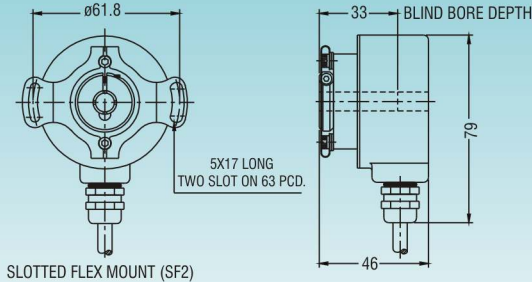

- Robust hollow shaft encoder
- Ideally suited for induction motor

J-260-ND-SL

Channels	R=ABZ / Q=AB / A=A
Output	HV= Driver (10mA Source /sink) without inverted channels HVLD= Driver (10mA Source /sink) with inverted channels PP= High Power Driver (50mA Source /sink) without inverted channels PPLD= High Power Driver (50mA Source /sink) with inverted channels OC= Open Collector without inverted channels
PPR	see ppr option below
Voltage	V1= 5vdc / V2= 10-28vdc / V3= 5-28vdc
Shaft Bore size Ø d	6= 6mm / 10= 10mm / 12= 12mm / 14= 14mm / X= special
Bore Style	B= Blind Hollow Shaft / T= Through Hollow Shaft
Protection	1= IP50 / 2= IP64 (for blind hollow shaft only)
Temperature	S= 70°C
Connection Location	SG= Side Gland only

Ordering Example = J-260-ND-SL-R-HV-1000-V1-6-B-1-S-SG

Model J-260-ND-SL PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300,305,333,350,360,480,500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250,1270,1500,2000,2048,2500,3000,4096,5000,6000,7200,8192 and 10000