JENCODER
J-260-58-AN-SL

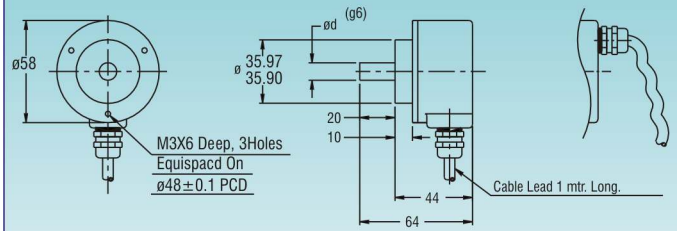

- Versatile model having many options
- High axial and radial load capacity
- Constructed to withstand the demands of rough and Tough industrial environment

J-260-58-AN-SL

Channels	**R**=ABZ / **Q**=AB / **A**=A
Output	**HV**= Driver (10mA Source /sink) without inverted channels
	HVLD =Driver (10mA Source /sink) with inverted channels
	PP=High Power Driver (50mA Source /sink) without inverted channels
	PPLD= High Power Driver (50mA Source /sink) with inverted channels
	OC=Open Collector without inverted channels
PPR	see ppr option below
Voltage	**V1**=5vdc / **V2**=10-28vdc / **V3**=5-28vdc
Shaft Ø d	**10**=10mm / **6**=6mm / **X**=special
Protection	**1**=IP50 / **2**=IP65
Temperature	**S**=70°C
Connection Location	**EG**=End Gland / **SG**=Side Gland / **E**=10pin End connector

Ordering Example = J-260-58-AN-SL-R-HV-1000-V1-10-1-S-EG

Model J-260-58-AN-SL PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46, 48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122, 125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180, 200, 210, 240, 250, 256, 276, 300, 305, 333, 350, 360, 480, 500, 512, 597, 600, 720, 750, 800, 840, 960,1000,1024, 1080, 1200, 1250, 1270, 1500, 2000, 2048, 2500, 3000, 4096, 5000, 6000, 7200, 8192 and 10000

• 020 2712 8095 / 6630 8094 • sales@jencoder.com • www.jencoder.com