


JENCODER 260-9 HD-N

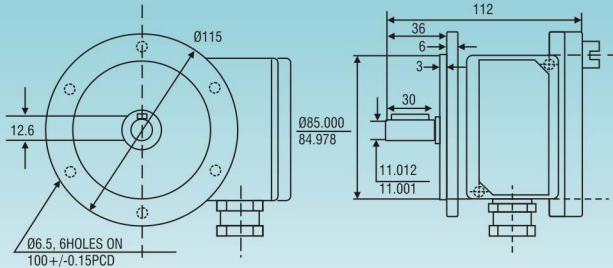

- Extremely robust construction having heavy duty bearings on opposite faces of housing allowing use of rigid coupling
- Optional terminal box for ease of connection
- Optional driver circuit for long distance cable(100m)
- Optional unbreakable disc available to withstand heavy shocks

J-260-9 HD-N

Channels	R=ABZ / Q=AB / A=A
Output	HV = Driver (10mA Source/sink) without inverted channels
	HVLD = Driver (10mA Source/sink) with inverted channels
	PP = High Power Driver (50mA Source/sink) without inverted channels
	PPLD = High Power Driver (50mA Source/sink) with inverted channels
	OC = Open Collector without inverted channels
PPR	see ppr option below
Voltage	V1 = 5vdc / V2 = 10-28vdc / V3 = 5-28vdc
Temperature	S = 70°C
Termination	T = Terminal Box / C = Connector

Ordering Example - J-260-9HD-N-R-HV-1000-V1-S-T

Model J-260-9 HD-N PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200, 210, 240, 250, 256, 276, 300, 305, 333, 350, 360, 480, 500, 512, 597, 600,720, 750, 800, 840, 960,1000,1024, 1080, 1200, 1250, 1270, 1500, 2000, 2048, 2500, 3000, 4096, 5000, 6000, 7200, 8192 and 10000