


JENCODER 260

CABLE LEAD 450mm STANDARD

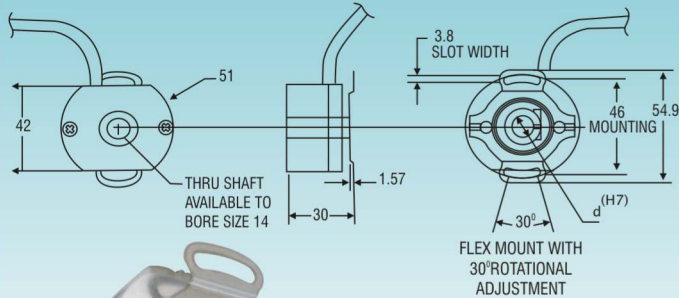

- Low profile 30 mm width.
- Integral bearing provides stable & consistent operation without concern for radial & axial play.
- Through shaft with clamp style mount.
- Simple, innovative flex mounting.

J-260

Channels	R=ABZ / Q=AB / A=A
Output	HV= Driver (10mA Source /sink) without inverted channels HVLD= Driver (10mA Source /sink) with inverted channels
PPR	see ppr option below
Shaft Bore size $\emptyset d$	6=6mm / 10=10mm / 12=12mm / 14=14mm / X=special
Bore Style	B=Blind Hollow Shaft / T=Through Hollow Shaft
Protection	1=IP50 / 2=IP64
Temperature	S=70°C / H=100°C / V=120°C

Ordering Example = J-260-R-HV-1000-6-B-1-S

* Operating Temperature	Max. allowable Operating voltage
70°C	5-28vdc
100°C	5-16vdc
120°C	5vdc

Model J-260 PPR Options

200,250,254,256,300,360,500,512,600,720,800,840,1000,1024,1200,1250,1270, 1500, 2000, 2048, 2500, 3000, 4096, 5000, 6000, 7200, 8192 and 10000