


J-260-58BN-SL

JENCODERTM
THE PERFECT CODER



All dimensions are in mm with a tolerance of ± 0.1 unless otherwise specified

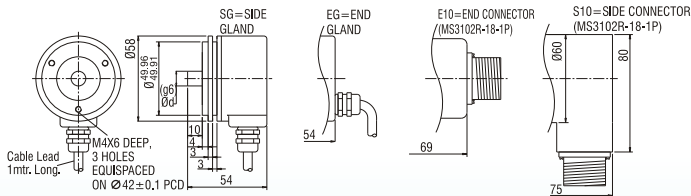

- Versatile model having many options
- Exact retrofit replacement for majority of machine tool spindle encoder
- Constructed to withstand the demands of rough & tough industrial environment

Channels	R = ABZ / Q = AB / A =A	
Output	HV	= Driver (10mA Source/Sink) without inverted channels
	HVLD	= Driver (10mA Source/Sink) with inverted channels
	PP	= Driver (50mA Source/Sink) without inverted channels
	PPLD/HTL	= Driver (50mA Source/Sink) with inverted channels
	OC	= Open Collector without inverted channels
	TTL/RS422	= Driver (10mA Source/Sink) with inverted channels at 5vdc
PPR	see ppr option below	
Voltage	V1 = 5 VDC / V2 = 10-28 VDC / V3 = 5-28 VDC	
Shaft Size Ø d	6 = 6mm / 10 = 10mm / X = Special	
Protection	1=IP50 / 2=IP65	
Temperature	S=0-70°C	
Connection	EG = End Gland / SG = Side Gland /	
Location	E10 = 10 pin End Connector / S10 = 10pin Side Connector	
CE Certified	N = Standard / CE = CE Certified	

Ordering Example – J-260-58BN-SL-R-HVLD-1000-V2-6-1-S-SG-N

Model J-260-58BN-SL PPR Options

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55, 60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136, 144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300,305,360,480, 500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250,1270,1500,2000,2048, 2500,3000,4096,5000,6000,7200,8192 & 10000